

多軸用電極本體 Point Holder





● 訂購編號 Code No.

W - P H - -

型式 Type

A1
A2
B

1.本體 Body
2.本體座 Clamp

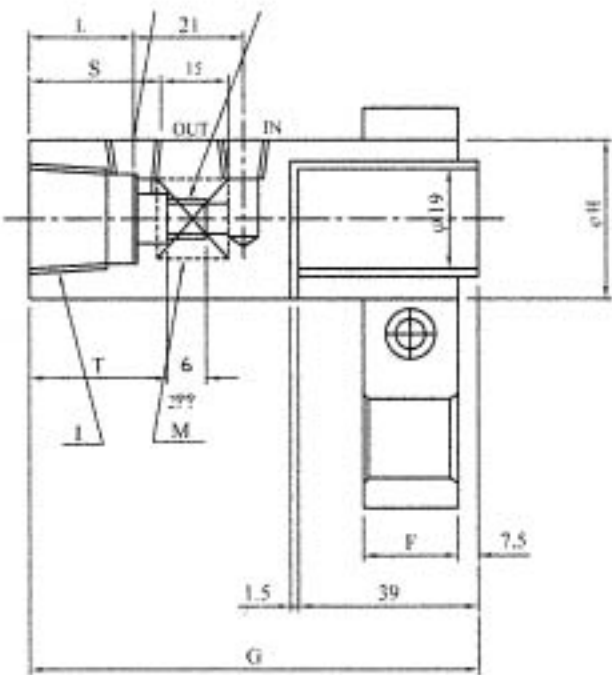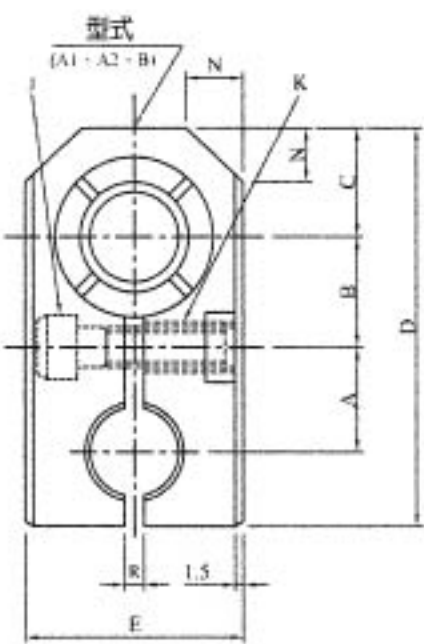

Code No.	A	B	C	D	E	F	G	φH	I	J	K	L	M	N	R	S	T
W-PH-A1	16	25	23	78	41	19	90.5	29	NPT 1/2 14山	M8 x 28 Bolt	M8 P=1.25	21	27	10	4	24	29
W-PH-A2	29			91											6		
W-PH-B	21	33	27	95	48	24	96.5	35	NPT 3/4 14山	M10 x 32 Bolt	M10 P=1.5	26	32	13	4	29	34





● 訂購編號 Code No.

W - P H - -

型式 Type

A1- 1
A2- 2

偏芯寸法
Offset Size

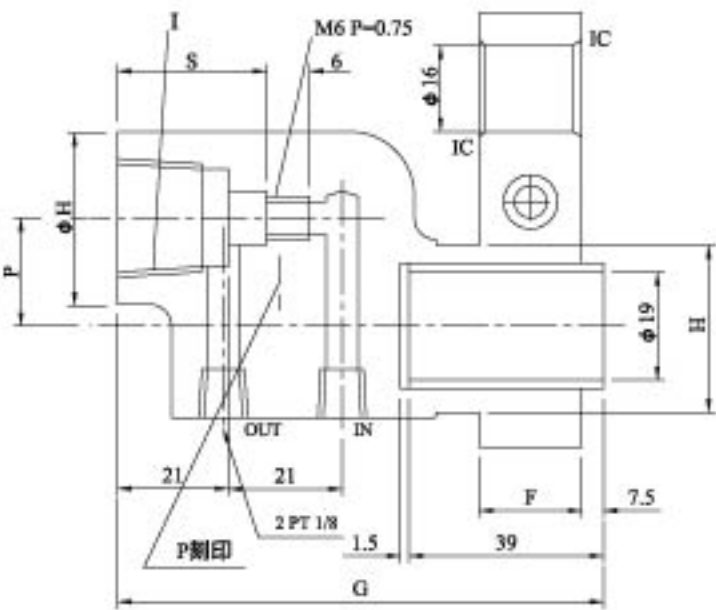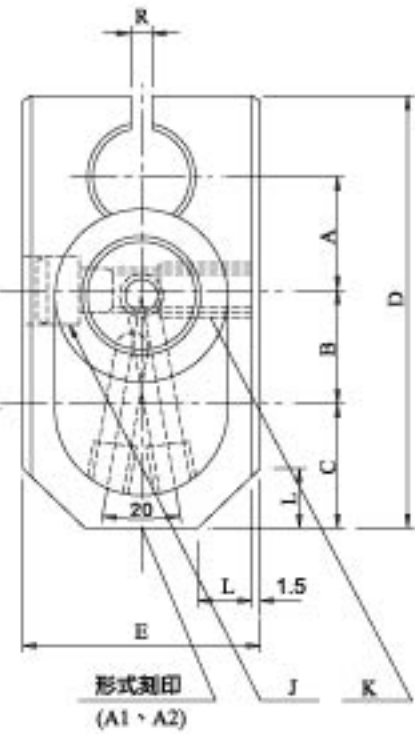

Code No.	A	B	C	D	E	F	G	φH	I	J	K	L	P	R	S
W-PH-C1x13	16	25	23	78	41	19	90.5	29	NPT ½14山	M8 x 28 Bolt	M8 P=1.25	10	13	4	29
W-PH-C2x13	29			91									6		
W-PH-C1x19	16			78									4		
W-PH-C2x19	32			91									6		

電極接頭 Electrode Adapter

Best
Business

● 訂購編號 Code No.

W - A D - - -

型式 Type

有效長 Size




材質 Material
1.Crcu
2.BeCu
3. *

Type	Code No.	Shank	Taper
A	W-AD-A	φ 16	MT-No.2、1/10
B	W-AD-B	φ 13	MT-No.1、1/10
D	W-AD-D	φ 19	1/10

W - AD - A -

W - AD - B -

W - AD - D -

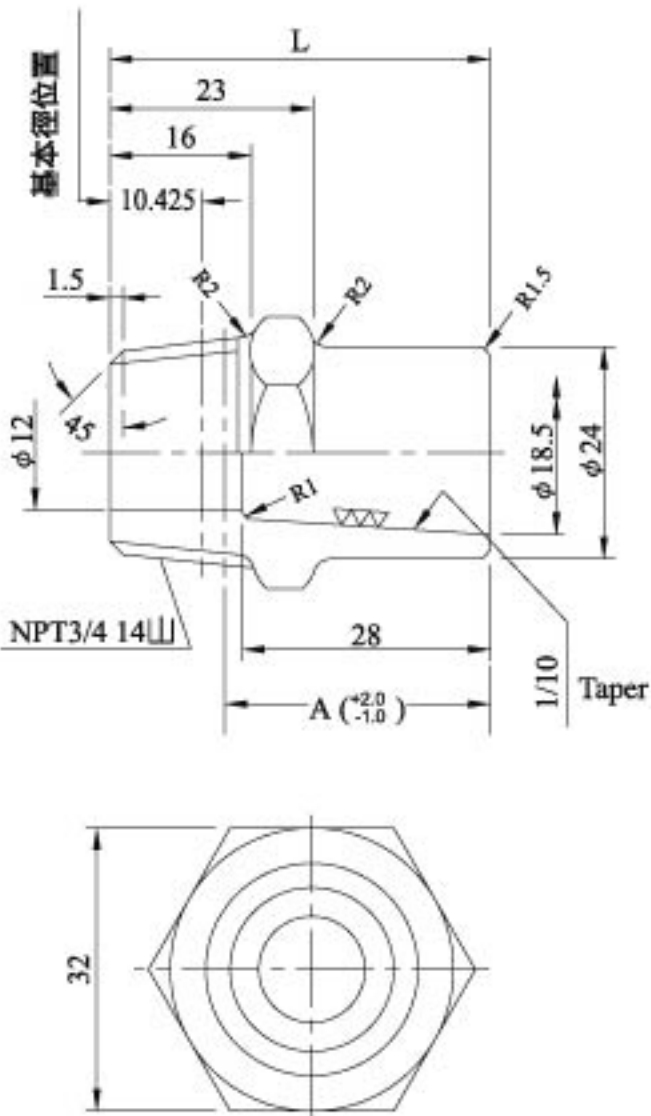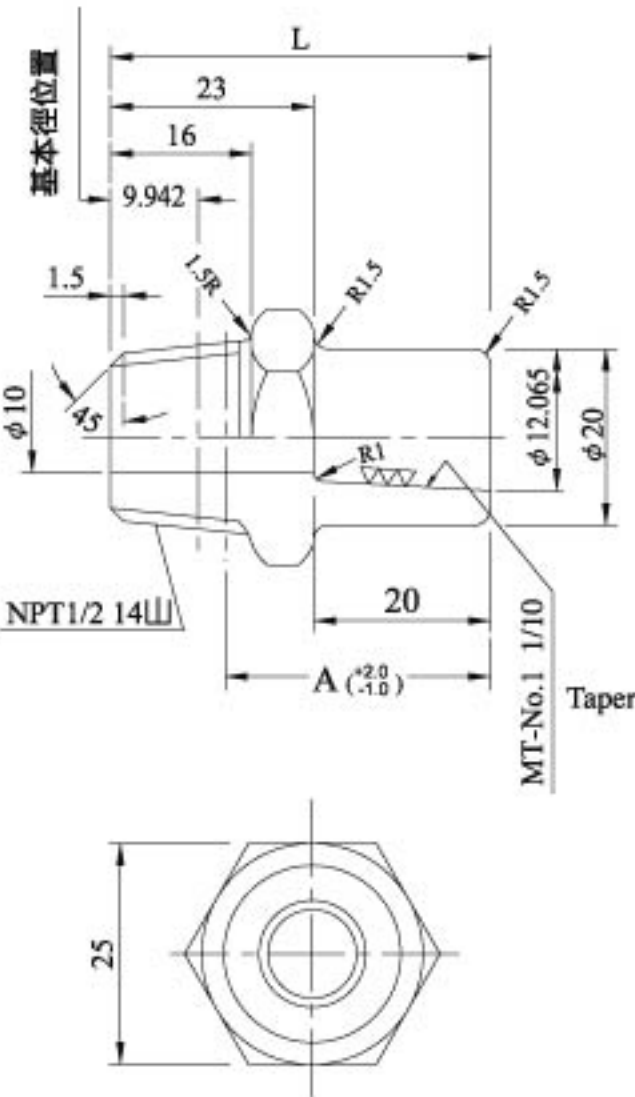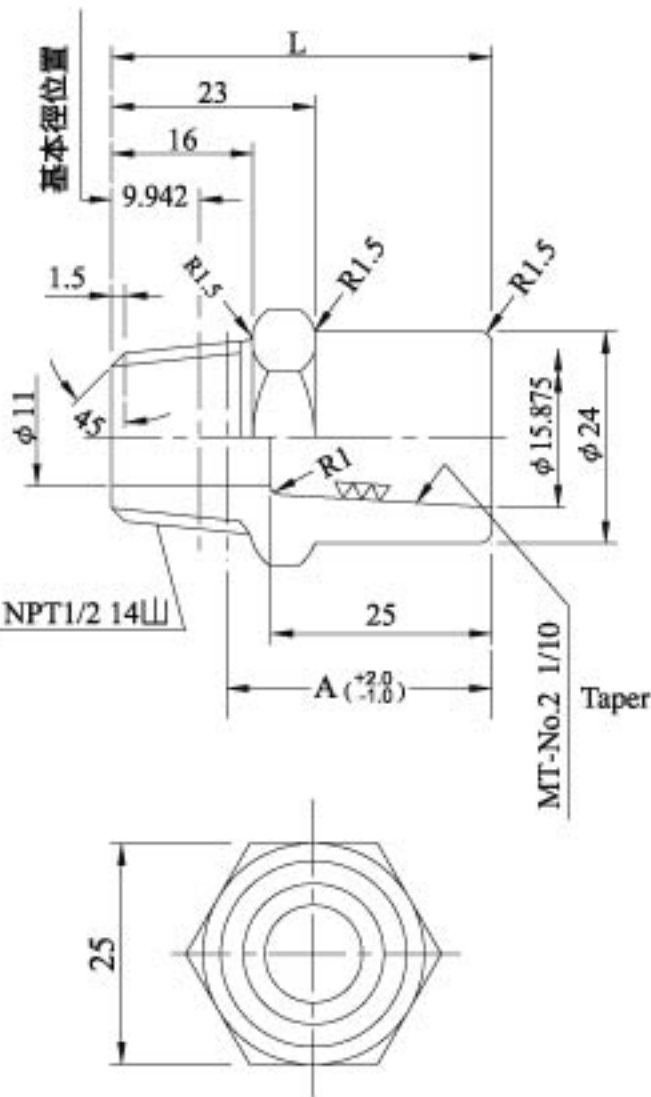

Code No.	全長L	有效長A
W-AD-A-10	23	10
W-AD-A-15	28	15
W-AD-A-20	33	20
W-AD-A-30	43	30
W-AD-A-40	53	40
W-AD-A-50	63	50
W-AD-A-60	73	60

Code No.	全長L	有效長A
W-AD-B-10	23	10
W-AD-B-15	28	15
W-AD-B-20	33	20
W-AD-B-30	43	30
W-AD-B-40	53	40
W-AD-B-50	63	50
W-AD-B-60	73	60


Code No.	全長L	有效長A
W-AD-D-10	23	10
W-AD-D-15	28	15
W-AD-D-20	33	20
W-AD-D-30	43	30
W-AD-D-40	53	40
W-AD-D-50	63	50
W-AD-D-60	73	60

標準型 Shank

W-SH- x -


A有效長
Size

1. Crcu
2. EKB-50
3. EKB-25

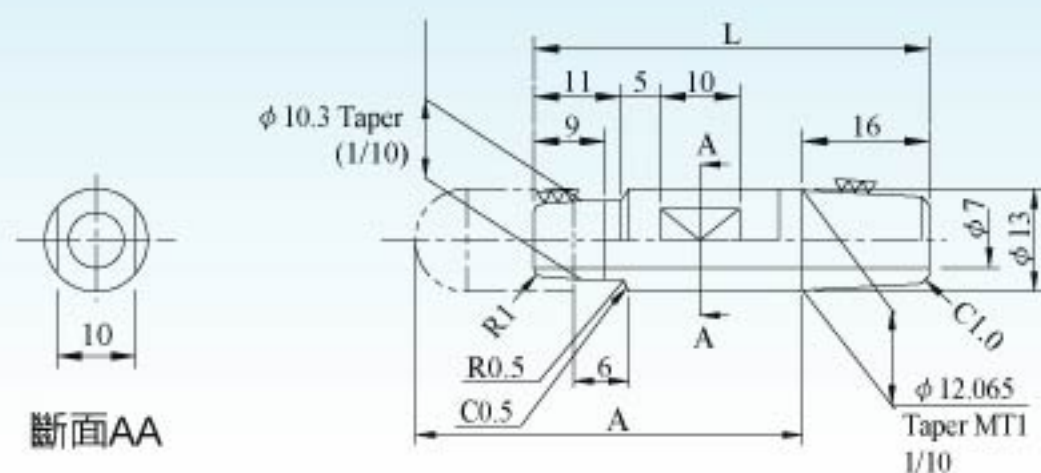


單位:mm

Code No.	L	A	Code No.	L	A
W-SH-13x25-	25	23	W-SH-13x60-	62	60
W-SH-13x30-	30	28	W-SH-13x70-	72	70
W-SH-13x35-	35	33	W-SH-13x80-	82	80
W-SH-13x40-	42	40	W-SH-13x90-	92	90
W-SH-13x50-	52	50	W-SH-13x100-	102	100

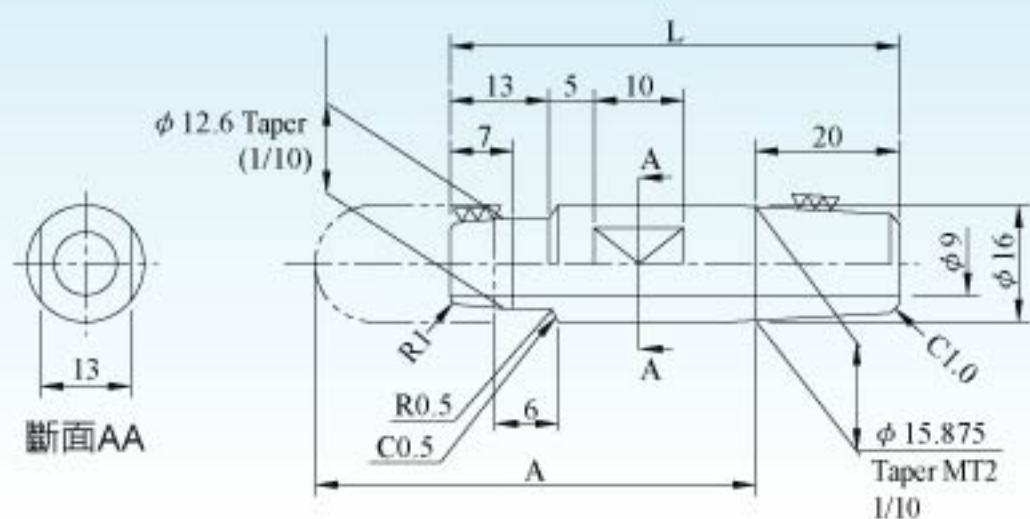

單位:mm

Code No.	L	A	Code No.	L	A
W-SH-16x40-	44	40	W-SH-16x100-	104	100
W-SH-16x50-	54	50	W-SH-16x110-	114	110
W-SH-16x60-	64	60	W-SH-16x120-	124	120
W-SH-16x70-	74	70	W-SH-16x130-	134	130
W-SH-16x80-	84	80	W-SH-16x140-	144	140
W-SH-16x90-	94	90	W-SH-16x150-	154	150

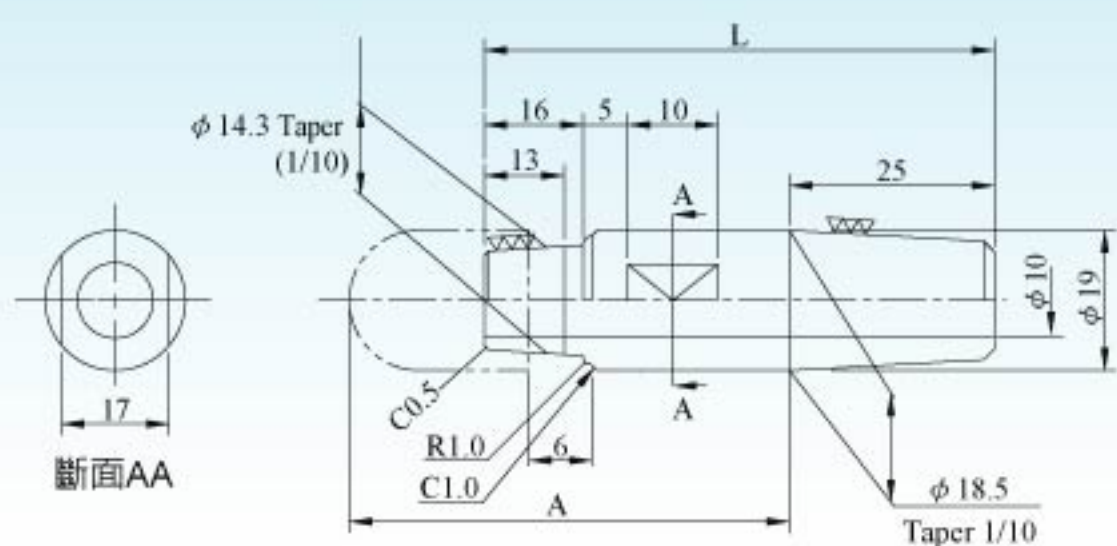

單位:mm

Code No.	L	A	Code No.	L	A
W-SH-19x40-	50	40	W-SH-19x80-	90	80
W-SH-19x50-	60	50	W-SH-19x90-	100	90
W-SH-19x60-	70	60	W-SH-19x100-	110	100


分段本體 Shank

段付B型

● 訂購編號 Code No.

W-SH-B-x-

外徑 O.D. 材質 Material
A有效長 Size 1.Crcu
 2.EKB-50
 3.EKB-25

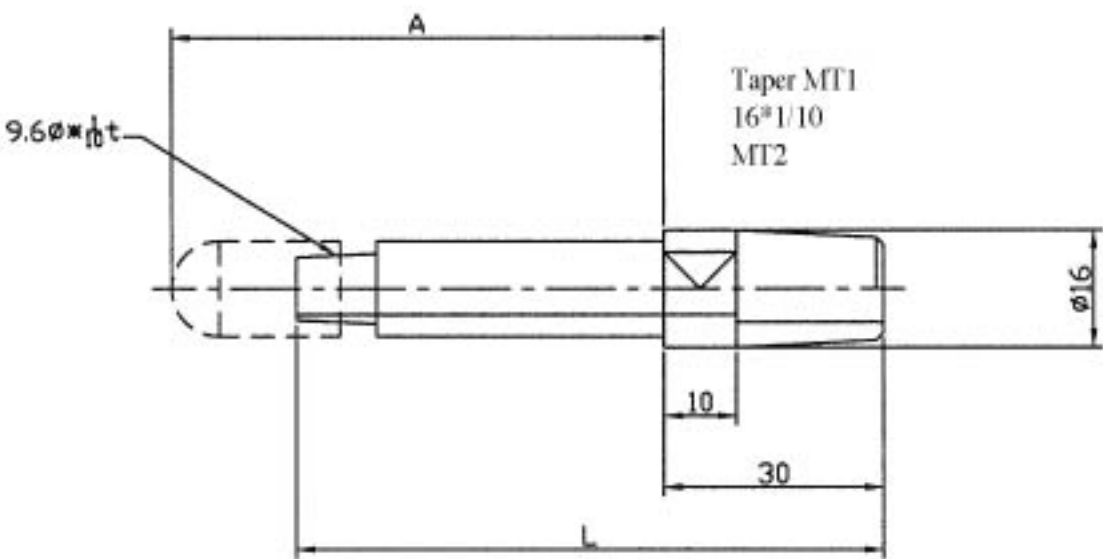

單位:mm


Code No.	L	A	Code No.	L	A
⑧13x32-	36	32	⑧13x102-	106	102
⑧13x42-	46	42	⑧13x112-	116	112
⑧13x52-	56	52	⑧13x122-	126	122
⑧13x62-	66	62	⑧13x132-	136	132
⑧13x72-	76	72	⑧13x142-	146	142
⑧13x82-	86	82	⑧13x152-	156	152
⑧13x92-	96	92			

SKK型

● 訂購編號 Code No.

W-SH-SKK-x-

外徑 O.D. 材質 Material
A有效長 Size 1.Crcu
 2.EKB-50
 3.EKB-25

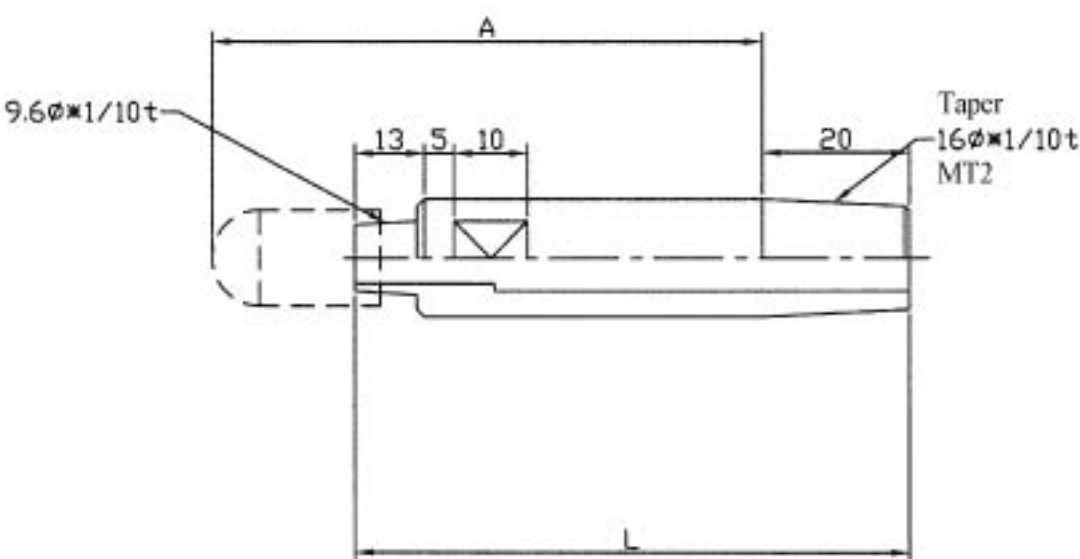

單位:mm


Code No.	L	A
SKK-13x 40-	46	40
SKK-13x 50-	56	50
SKK-13x 60-	66	60
SKK-13x 70-	76	70
SKK-13x 80-	86	80
SKK-13x 90-	96	90
SKK-13x100-	106	100
SKK-13x110-	116	110
SKK-13x120-	126	120

偏芯型 Offset Shank

● 訂購編號 Code No.

W-SH-x--

外徑 O.D. 材質 Material
B尺寸 Size 1.Crcu
PR尺寸 Size 2.EKB-50
 3.EKB-25

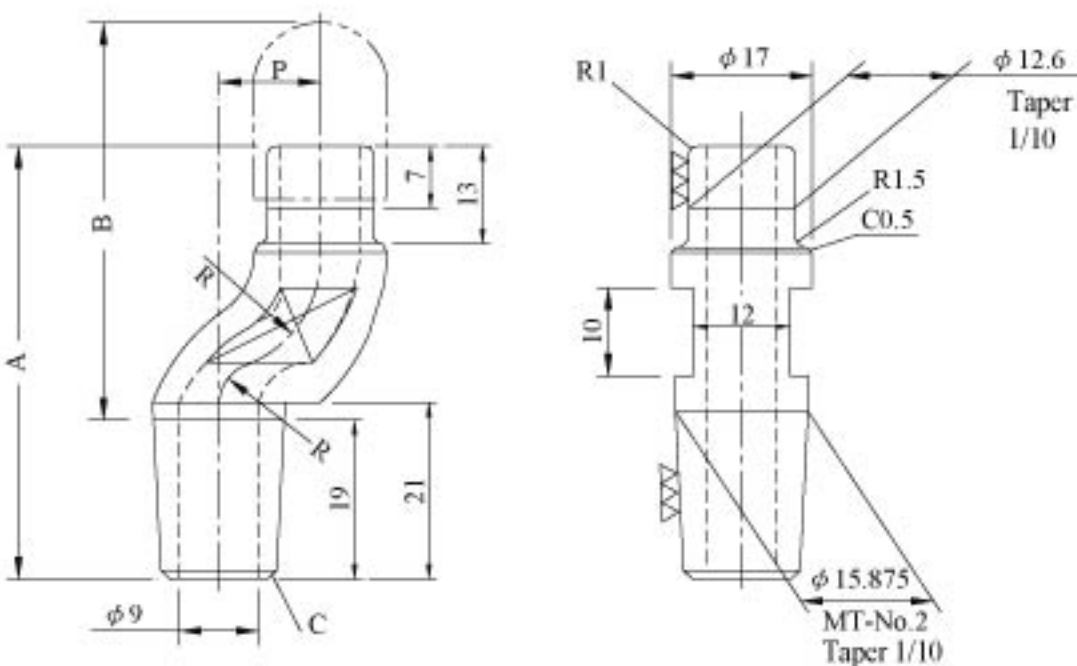

單位:mm

Code No.	P	A	B
W-SH-16x50-3	3	53	50
W-SH-16x50-6	6	53	50
W-SH-16x50-9	9	53	50
W-SH-16x50-13	13	53	50
W-SH-16x60-3	3	63	60
W-SH-16x60-6	6	63	60
W-SH-16x60-9	9	63	60
W-SH-16x60-13	13	63	60
W-SH-16x60-15	15	63	60
W-SH-16x60-19	19	63	60
W-SH-16x80-6	6	83	80
W-SH-16x80-9	9	83	80
W-SH-16x80-13	13	83	80
W-SH-16x80-15	15	83	80
W-SH-16x80-19	19	83	80
W-SH-16x80-25	25	83	80
W-SH-16x100-19	19	103	100



單位:mm

Code No.	全長 Length	尺寸 Dimensions				
		φA	φB	φC	T	L
T□-12-	35	12	4	8	15	L=L-15
	45		5			
T□-13-	55	13	4	8	15	L=L-15
	65		5			
T□-16-	75	16	5	10	20	L=L-20
	85		6			
T□-19-		19	6	10	20	L=L-20
			8			

●訂購編號 Code No.

T□-16-50-6-1-1

型式 Type

外徑 OD

全長 L

點徑
Spot Dia

錐度
Taper

1	1/9.6
2	1/10
3	1/5

1	CrCu
2	BeCu
3	AlCu
4	*

材質
Material

型式Type






D型

R型

P型

E型

F型

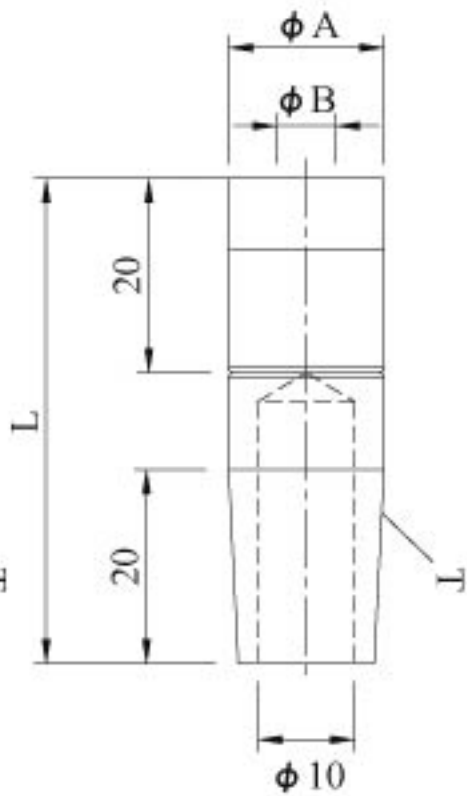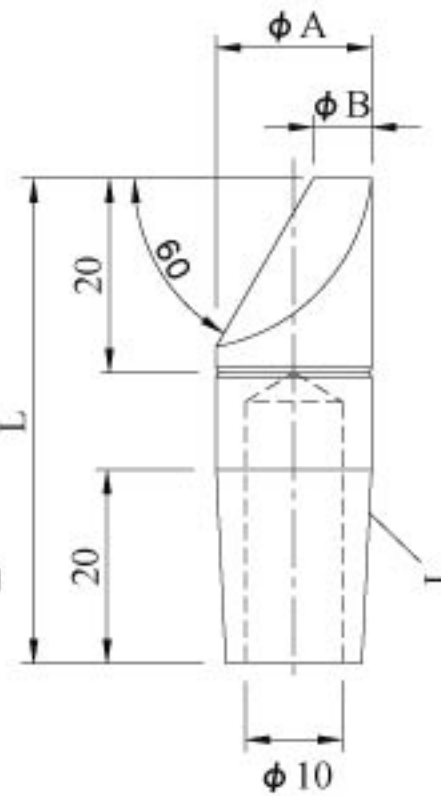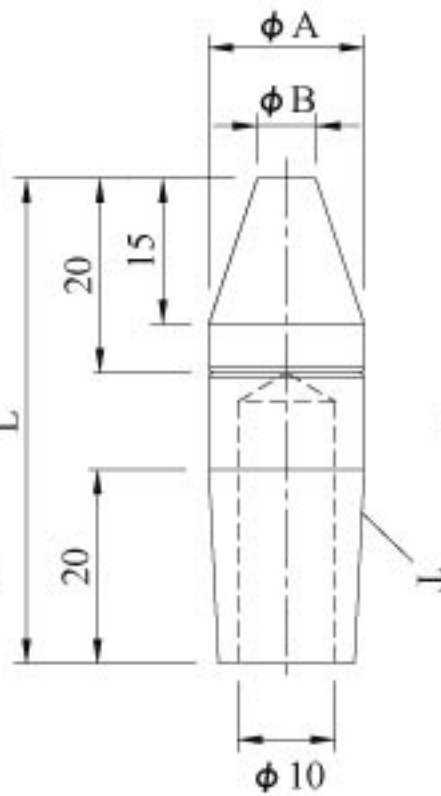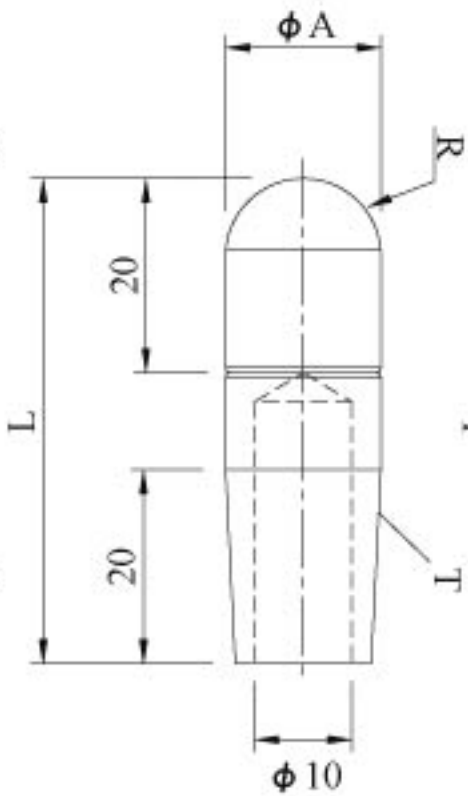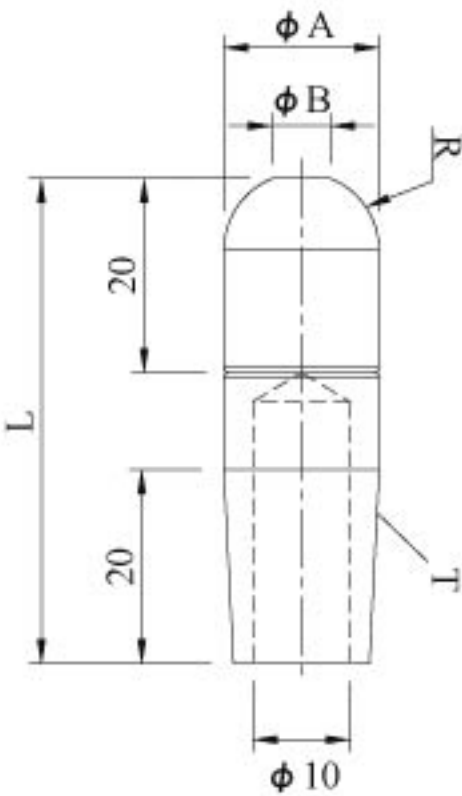



單位:mm

● 訂購編號 Code No.

Code No.	全長 Length	尺寸 Dimensions					
		φA	φB	φC	T	R	L
C□-12-	20	12	5	10	1/9.6	6R	9
	(23)		6		1/10		
	25						
C□-13-	20	13	5	10	1/10	6.5R	9
	23		6				
	25						
C□-16-	20	16	5	12.6 (12)	1/10 * (1/9.6)	8R	9
	23		6				
	25						

C□ - 12 - 20 - 5 - 1 - 1

型式 Type

外徑 OD

全長 L

點徑
Spot Dia

錐度

Taper

1	1/9.6
2	1/10

材質
Material

1	CrCu
2	BeCu
3	AlCu
4	*

* 為特殊規格(Special Products)

型式Type






D型

R型

P型


E型

F型

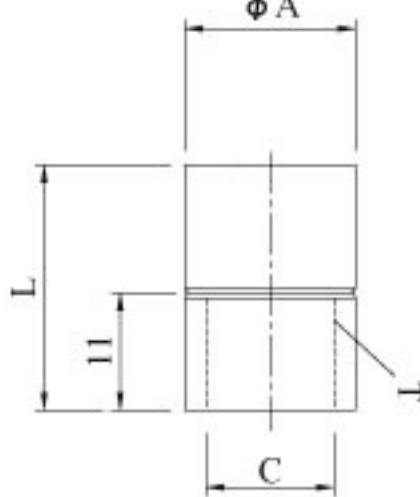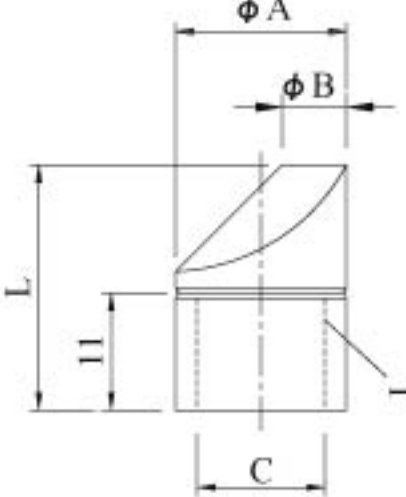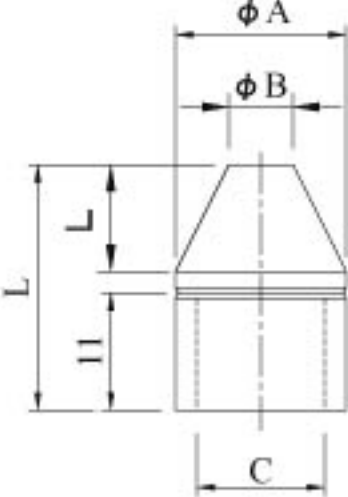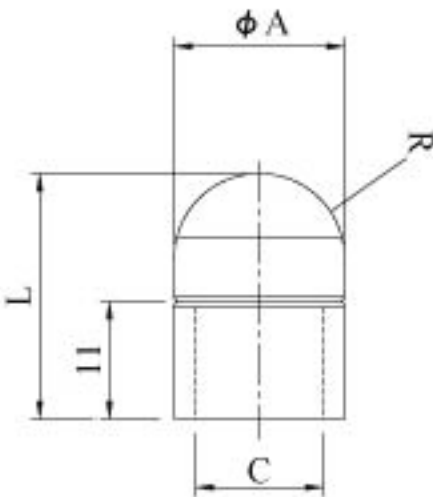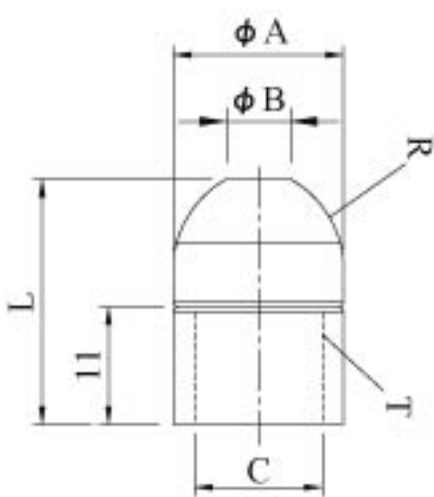


K型螺帽用電極 Nut Electrode

瓷頭 Ceramic Guide Pin

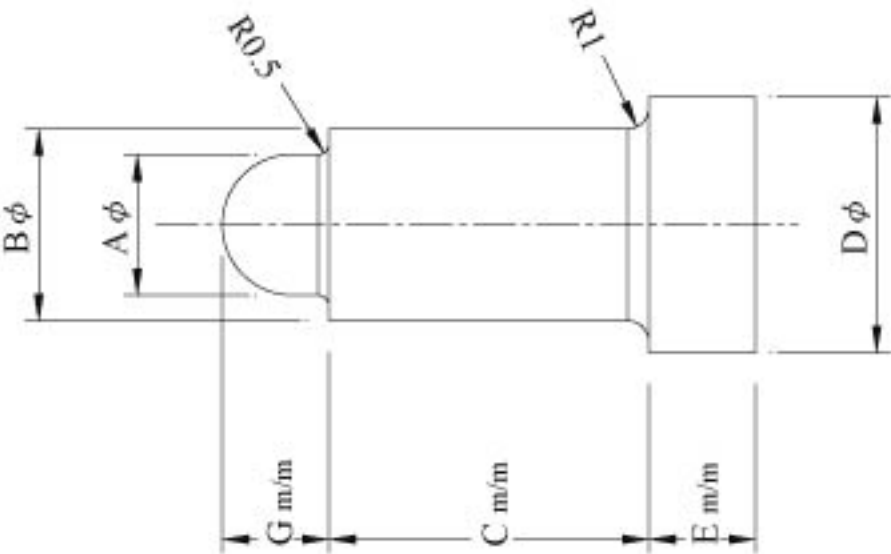

單位:mm

NUT	Code No.	øA	øB	C	øD	E	G
M4	K-No.328	3.2	5.9	15.0	8.3	5.0	3.5
M5	K-No.2	4.1	6.1	15.0	10.0	5.0	4.0
M6	K-No.3	4.8	6.9	15.0	10.0	5.0	4.5
M8	K-No.9	6.6	9.0	15.0	12.0	5.0	5.0
M10	K-No.29	8.6	11.2	15.0	14.0	5.0	8.0
M12	K-No.86	9.6	12.9	16.0	14.0	5.0	6.0

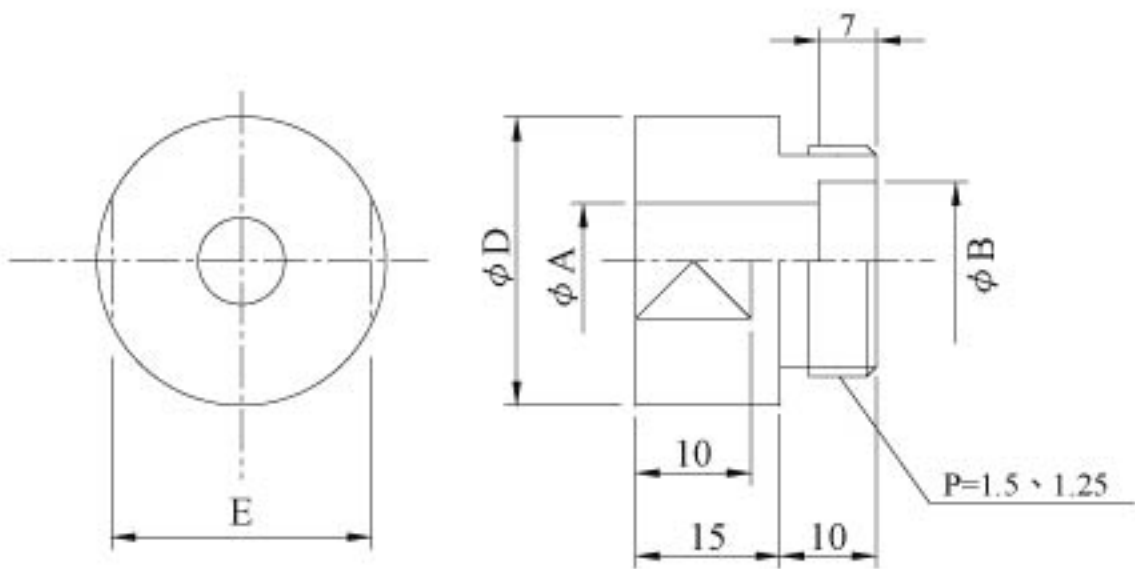


螺帽上蓋(瓷頭用) Nut Electrode Cover

單位:mm

NUT	Code No.	øA	øB	C	øD	スパン巾
M4	W-PN-A4	6.0	13	M18	25	22
M5	W-PN-A5	6.2	13	M18	25	22
M6	W-PN-A6	7.0	13	M18	25	22
M8	W-PN-A8	9.1	15	M18	25	22
M10	W-PN-A10	11.3	17	M22	30	27
M12	W-PN-A12	13.0	17	M22	30	27

螺帽電極本體

Nut Electrode Body

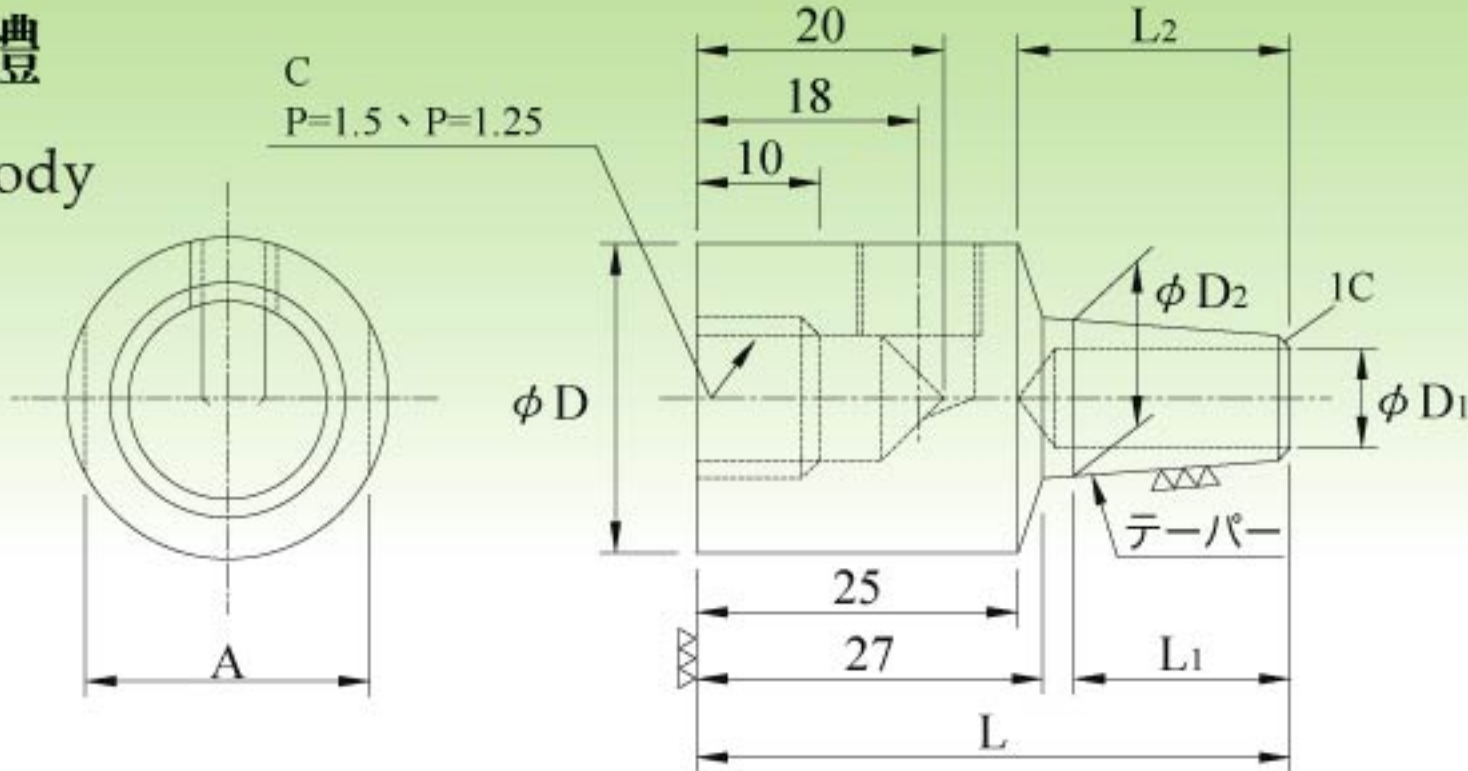


單位:mm

Code No.	øD	øD1	øD2	Taper	L	L1	L2	A	C
W-PN-B1-	25	8	15.875	1/10	49	20	24	22	M18
W-PN-B2-	30	8	15.875	1/10	49	20	24	27	M22


K.C.F螺帽電極 Nut Electrode

KCF定位芯 KCF Guide Pin

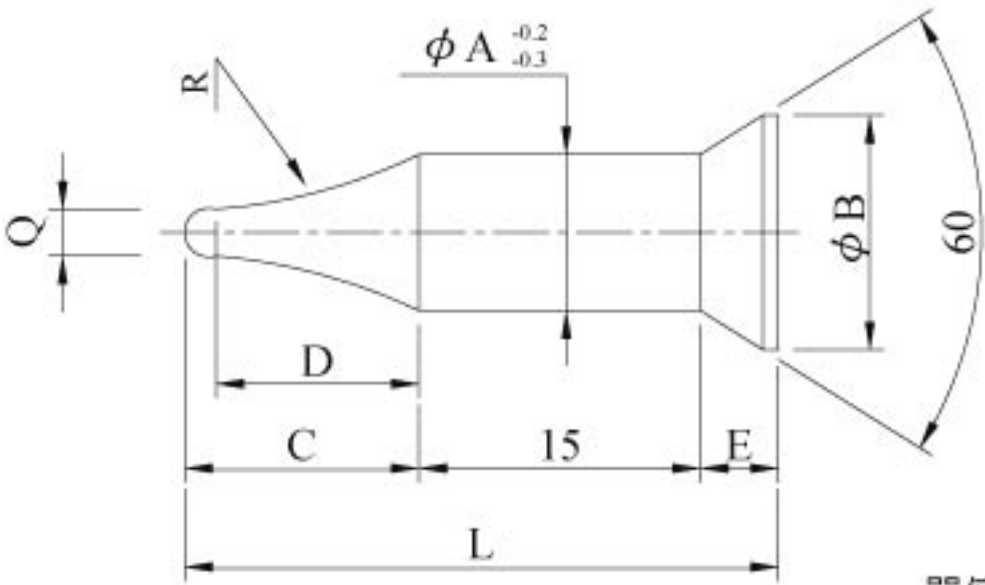

單位:mm

NUT	Code No.	ϕA	ϕB	L	C	D	E
M4	W-PN-4P	4.8	12	29	6.5	5.5	7.5
M5	W-PN-5P	5.8	12	30	8.5	7.5	6.5
M6	W-PN-6P	6.8	12	31.5	11	9.5	5.5
M8	W-PN-8P	8.8	12	31	12	11	4
M10	W-PN-10P	10.8	16	34.5	14	12	5.5
M12	W-PN-12P	12.8	16	36	17	15	4

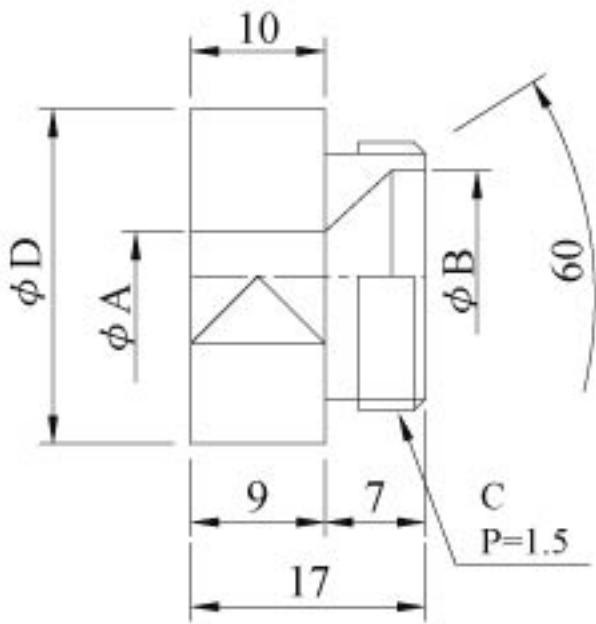


螺帽上蓋 (KCF用) Nut Electrode Cover

單位:mm

NUT	Code No.	ϕA	ϕB	C	ϕD	スパナ巾
M4	W-PN-C4	5.1	13	M18	25	22
M5	W-PN-C5	6.1	13	M18	25	22
M6	W-PN-C6	7.1	13	M18	25	22
M8	W-PN-C8	9.1	13	M18	25	22
M10	W-PN-C10	11.1	17	M22	30	27
M12	W-PN-C12	13.1	17	M22	30	27

螺帽電極本體

Nut Electrode Body

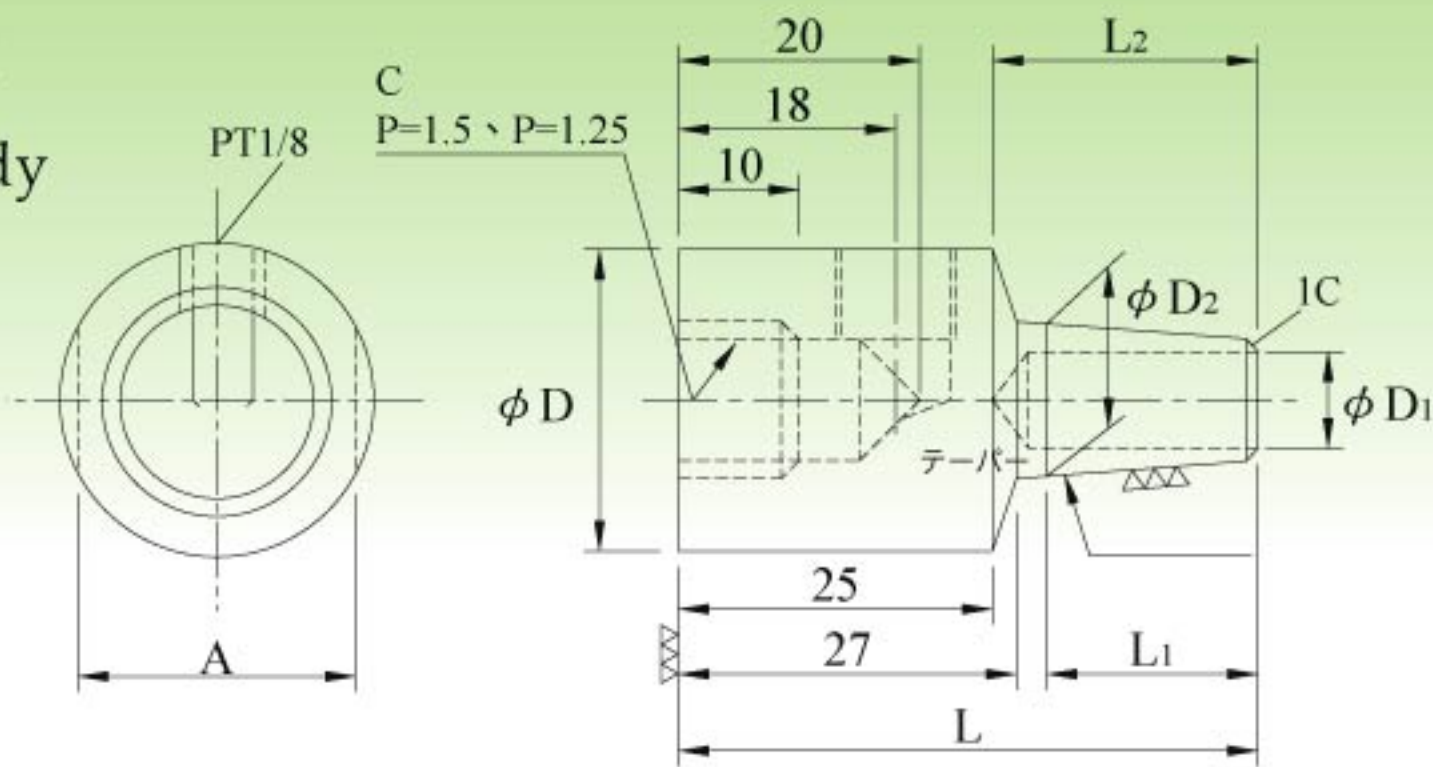

單位:mm

Code No.	ϕD	$\phi D1$	$\phi D2$	Taper	L	L1	L2	A	C
W-PN-B1-	25	8	15.875	1/10	49	20	24	22	M18
W-PN-B2-	30	8	15.875	1/10	49	20	24	27	M22

螺絲電極 Bolt Electrode

KCF絕緣套管 Sleeve

●訂購編號 Code No.

KCF-B6 **6.2**

材質 Material 品名 Sleeve 內徑 Sleeve I.Dia





Code No.	øA	øB	C
KCF-B4 4.0	4	6.1	17
B5 5.0	5	7.1	17
B6 6.0	6	8.1	22
B7 7.0	7	9.1	22
B8 8.0	8	10.1	27
B9 9.0	9	11.1	27
B10 10.0	10	12.1	32
B11 11.0	11	13.1	32
B12 12.0	12	14.1	32

Code No.	øA	øB	C
KCF-B4 4.2	4.2	6.1	17
B5 5.2	5.2	7.1	17
B6 6.2	6.2	8.1	22
B7 7.2	7.2	9.1	22
B8 8.2	8.2	10.1	27
B9 9.2	9.2	11.1	27
B10 10.2	10.2	12.1	32
B11 11.2	11.2	13.1	32
B12 12.2	12.2	14.1	32
B13 13.2	13.2	15.1	32
B14 14.2	14.2	16.1	32
B15 15.2	15.2	17.1	32

螺絲電極本體 Bolt Electrode Body

●一體式

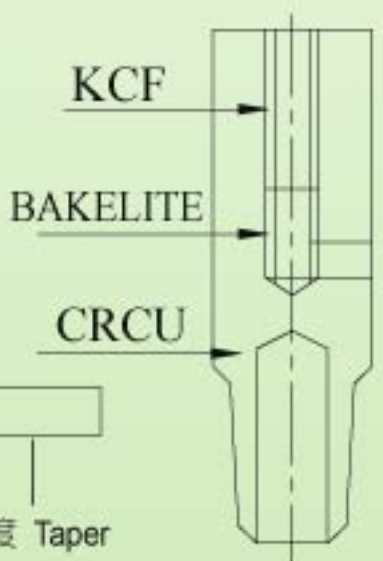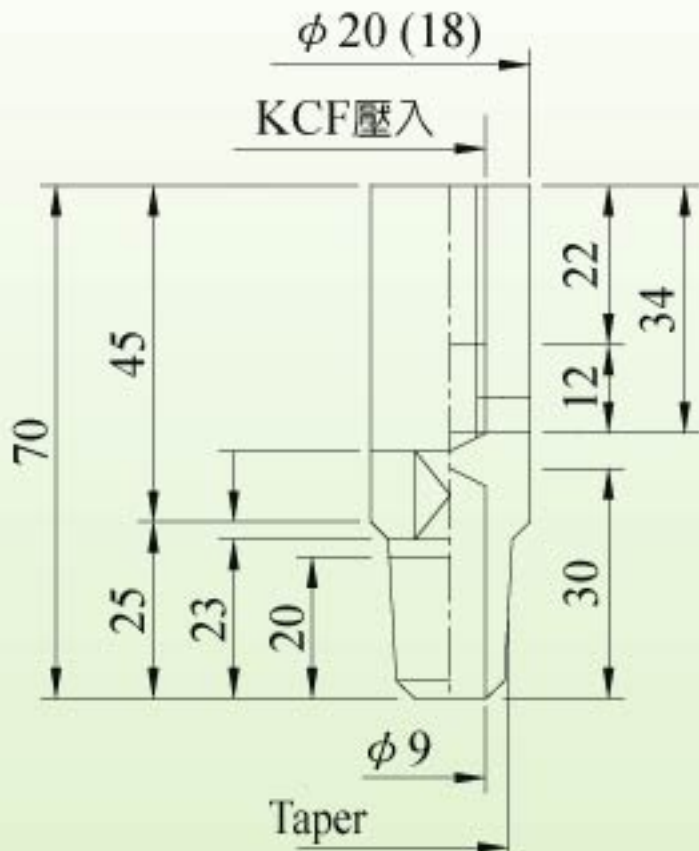


18 B4 4.2 -65-

外徑 O.Dia Sleeve ID 錐度 Taper 全長 L

套管 Sleeve

M4	18 B4 4.2 -65-
M5	18 B4 4.2 -65-
M6	18 B4 4.2 -65-
M8	18 B4 4.2 -65-
M10	18 B4 4.2 -65-
M12	18 B4 4.2 -65-

●分離式

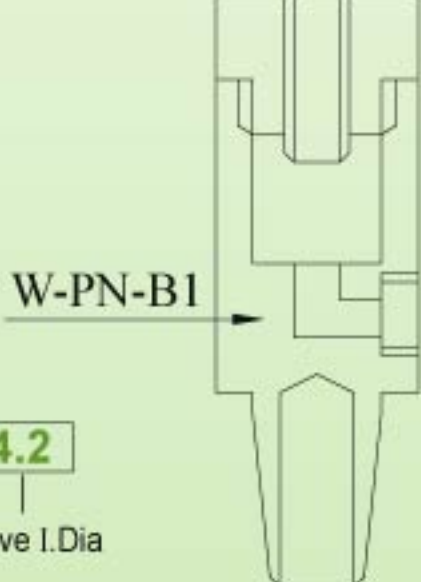

25MB-B4 4.2

電極外徑 O.Dia Sleeve I.Dia

M4	25MB - B4 10.2
M5	25MB - B4 10.2
M6	25MB - B4 10.2
M8	25MB - B4 10.2
M10	30MB -B10 10.2
M12	30MB -B12 12.2


N形電極 Bend Electrode

A collection of various metal pipe fittings, including elbows, tees, and flanges, arranged on a light green background. The fittings are made of a dark, possibly black-painted, metal. They include several 90-degree elbows of different sizes, a tee fitting, and a flange. Some fittings have threaded ends, while others have smooth, flared ends. The arrangement is somewhat haphazard, with some fittings standing upright and others lying flat.

電極本體 Holder



電極本體 Holder

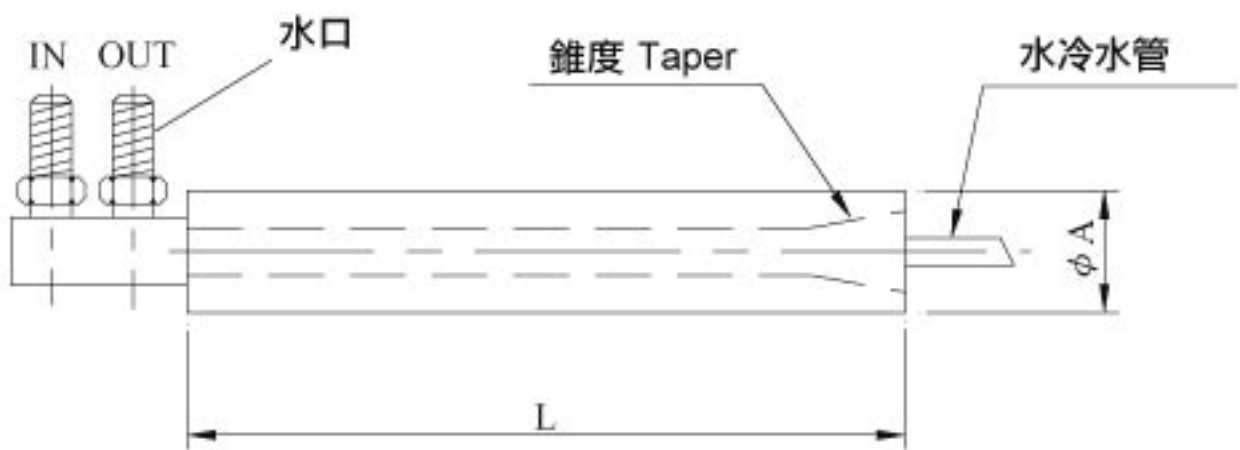

Code No.	A	L	Taper
25x150-	25	150	16 1/10、16 1/5
25x200-	25	200	16 1/10、16 1/5
25x250-	25	250	12 1/10、16 1/10、16 1/5、16MT ₂
25x300-	25	300	16 1/10、16 1/5
32x200-	32	200	16 1/10、16 1/5
32x250-	32	250	16 1/10、16 1/5、16MT ₂ 、20 1/5

L型電極本體 L Type Holder

Code No.	間 距	Taper	角 度	φ徑
JS-0525	50	1/5, 1/10	90°	25
JS-0525R	50	1/10	15°	
JS-1025	100	1/5, 1/10	90°	
JS-1025R	100	1/10	15°	
JS-0532	50	1/5, 1/10	90°	32
JS-0532R	50	1/10	15°	
JS-1032	100	1/5, 1/10	90°	
JS-1032R	100	1/10	15°	




F型/直型水管配件 Parts



電極座本體 Electrode Platen





桁 Horn

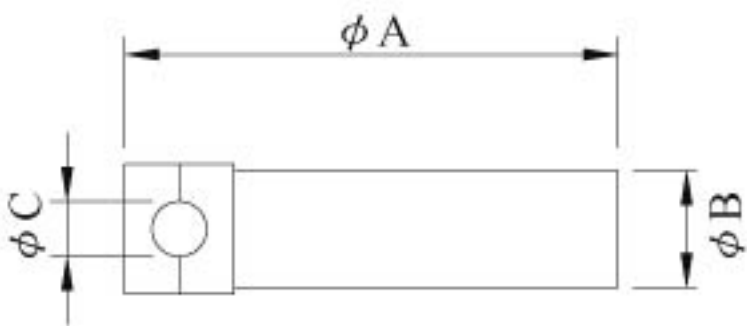

材質:BSBM

Code No.	A	B	C
H60-230-25	230	60	25
H60-300-25	300	60	
H70-230-32	230	70	32
H70-300-32	300	70	

Code No.	A	B	C
HK60-300-25	300	60	25
HK60-300-25W	300	60	25

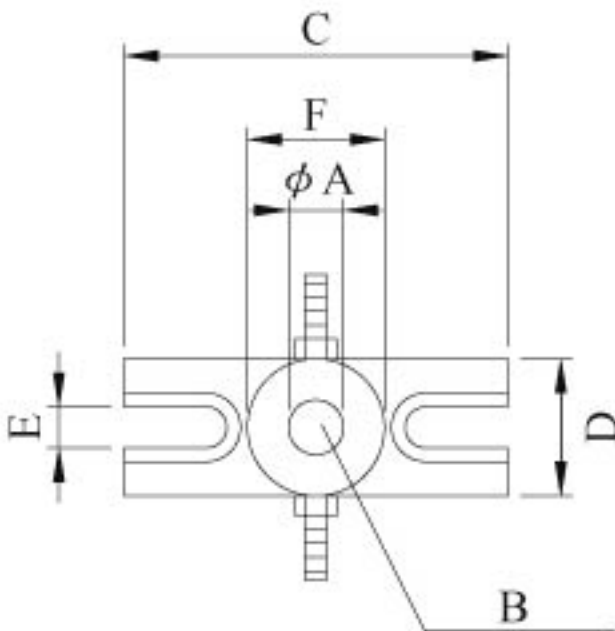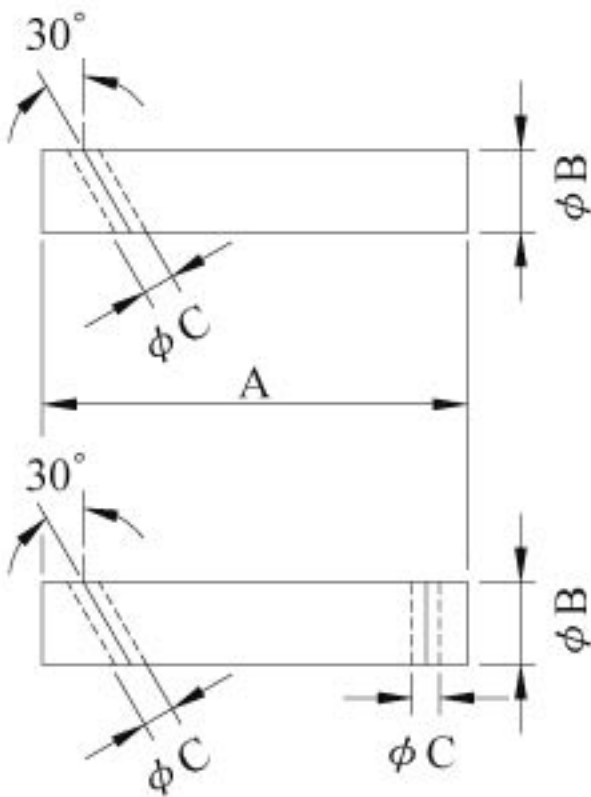

凸型電極座 Platen



Code No.	A	B	C	D	E	F	
PH150-16-1/5	16	1/5	150	60	18	$\phi 60$	$\square 150$
PH150-16-1/10		1/10					
PH150-20-1/5	20	1/5	200	75	20	$\phi 60$	$\square 200$
PH150-20-1/10		1/10					
PH200-16-1/5	16	1/5	200	75	20	$\phi 60$	$\square 200$
PH200-16-1/10		1/10					
PH200-20-1/5	20	1/5	200	75	20	$\phi 60$	$\square 200$
PH200-20-1/10		1/10					